


## Instructions for Use

CELLevator<sup>™</sup> - Stacking Device for CELLdisc<sup>™</sup> (Item-No. 878071)

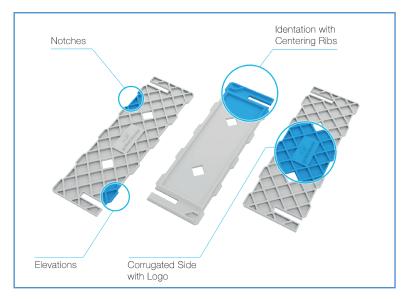

## Intended Use

The CELLevator™ facilitates easy and secure stacking of two CELLdisc™ devices.

## **Product Details**

The CELLevator™ consists of three identical segments with indentations and centering ribs which assembled form a triangle.


The corrugated side of the stripe with the Geiner Bio-One logo must always be on the outside of each part and the final stacking device.

→ Assembly guide on the reverse side →


Feature	Properties
Material	Polypropylene
Max. Loading Capacity	8 kg (refers to the assembled CELLevator™)
Autoclavability	Yes (120 °C, 2 bar), max. 3 times*
TP-range	4°C-37°C
Sterility	No

\* Autoclaving the CELLevator™ more than 3 times is not recommended. After each autoclave cycle the integrity of the segments has to be analysed by the user.

## CELLevator™ - Assembling Guide



1 Join segment (1) with segment (2) using the indentations. Centering ribs at the side of the indentation guide the segments together.




**3** Lift segment (2) and insert into the remaining indentation from segment (3).

Slight bending of the segments during the insertion is acceptable.



5 The CELLevator™ must be positioned within the circumferential ring of the top plate of the CELLdisc™.



dingly with the indentation of segment (1) from above.

2 Join segment (3) accor-



**4** The final assembled CELLevator™ should form a uniform triangle.



6 The other CELLdisc™ can now be positioned on top of the CELL-evator™. Ventilation of the lower CELLdisc™ is assured by the notches on the segments whereas planarity of the upper CELLdisc™ is assured by the elevations on the segments

HUBERLAB. AG Industriestrasse 123 4147 Aesch T 061 717 99 77 F 061 711 93 42

www.huberlab.chinfo@huberlab.ch

